GUTWILLEN®

COMPLETE PEACE OF MIND



Grammy Series LED Flood Light 200W

Item Name : Gutwillen LED Flood LIght

Input Power : 200W

Operating Volatage : 100-300VAC/50Hz

Operating Temp. : -10°C to 60°C

Lumen : 22000lm

Power Factor : >0.95

CRI : >80

Beam Angle : 120°

Dimension : 315x336x72mm

(Carton.Qty) (5)







Grammy 100W

Item Name: Gutwillen Led Flood Light

Power: 100W

Input Power: 100W

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen : 11000lm

Power Factor: >0.95

CRI: >80

Beam Angle: 120°

Dimension: 275x285x64mm

(Carton.Qty) (5)







Grammy Pro Series 100W

Item Name : Gutwillen Led Flood Light

Power: 100W

Input Power : 100W

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen: 10000lm

Power Factor : >0.95

CRI: >80

Beam Angle : 120°

Dimension : 223x227x49mm

IP 66

(Carton.Qty) (10)



Grammy Series 50W

Item Name : Gutwillen Led Flood Light

Power : 50w

Input Power : 50w

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen: 5500lm

Power Factor: >0.95

CRI: >80

Beam Angle: 120°

Dimension: 223x227x49mm

PI : 66

(Carton.Qty) (20)



Grammy Pro Series 50W

Item Name : Gutwillen LED Flood Light

Input Power : 50w

Operating Volatage: 100-300VAC/50Hz

Operating Temp. :-10°C to 60°C

Lumen : 5500lm

Power Factor : >0.95

CRI : >80

Beam Angle : 120"

Dimension : 182x182x42mm

(Carton.Qty) (20)



Econoray Series 200W

Item Name : Gutwillen Led Flood Light

Power: 200W

Input Power: 200W

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 22000lm

Power Factor : >0.95

CRI : >80

Start Mode: Instant Start

IP Rating : IP-66

(Carton.Qty) (5)



Econoray Series 100W

Item Name : Gutwillen Led Flood Light

Power: 100w

Input Power: 100w

Operating Volatage: 85-300VAC/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 11000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating : IP-66

(Carton.Qty) (10)



Econoray Series 50W

Item Name : Gutwillen Led Flood Light

Power: 50w

Input Power: 50w

Operating Volatage: 85-300VAC/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 5500lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66

(Carton.Qty) (20)



Kleinmeister Series 100W

Item Name : Gutwillen Led Flood Light

Power : 100W

Input Power : 100W

Operating Volatage: 85-300Vac/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 10000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66

(Carton.Qty) (10)



Kleinmeister Series 50W

Item Name : Gutwillen Led Flood Light

Power : 50W

Input Power : 50W

Operating Volatage: 85-300Vac/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 5000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66

(Carton.Qty) (20)



Octaglow Concealed 8W

Item: PC Concealed Down Light Watt :

8W

Voltage: 100-300

Surge Protection : >4.0KV


Lumen: 110lm/W Efficacy:

70%

Power Factor : >0.95 CRI :

>80

(Carton.Qty) (50)

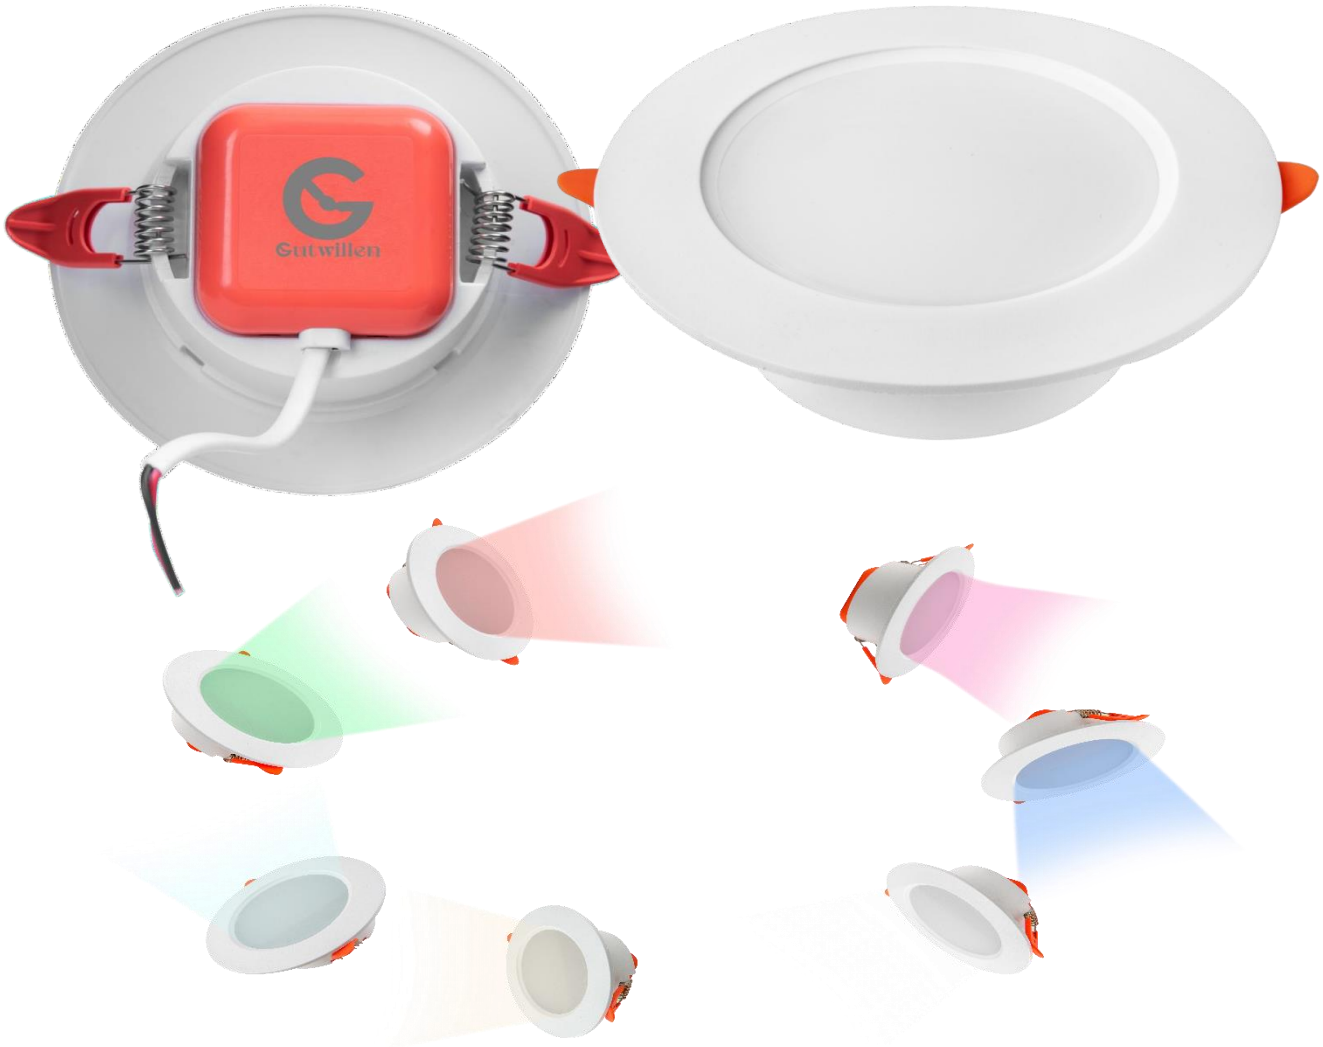

Luminous Saver 6W

Item: LED CONCEALED LIGHT

Rated Wattage: 6W

Rated Voltage: 220-240 Vac

Surge Protection : ≥4.0KV

Lumen Efficacy : 80lm/W

Power Factor : >0.90

CRI: >80

(Carton.Qty) (100)



Aurale Designer Conceal 7W

Item: COB DOWN LIGHT

Rated Wattage : 7W

Rated Voltage : 220-240Vac

Surge Protection : >4.0KV

Lumen Efficacy : 80lm/W

Power Factor : >0.90

CRI: >80

(Carton.Qty) (50)



Radiant Orbicular Striker 5W

Item: Striker led light

Watt : 5W

Voltage: 200-240

Surge Protection : >2.5KV

Lumen: 80lm/W

Power Factor: >0.90

CRI : >80

(Carton.Qty) (100)



Glow Sphere Series 5W Striker Light

Item: Striker led light

Watt : 5W

Voltage: 200-240

Surge Protection: >2.5KV

Lumen: 70lm/W

Power Factor: >0.90

CRI : >80

(Carton.Qty) (100)



Illuminate Pro 12W Twins 2 in 1

Item : PC Concealed Down Light

Input Power : 12W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature : -10°C to 45°C

Lumens : 1200 lm

Power Factor: >0.9

CRI : ≥80

IP Grade : IP20


Beam Angle : 120°


Surge Protection : 4.0kV


Dimension : 130x72 mm


(Carton.Qty) (20)



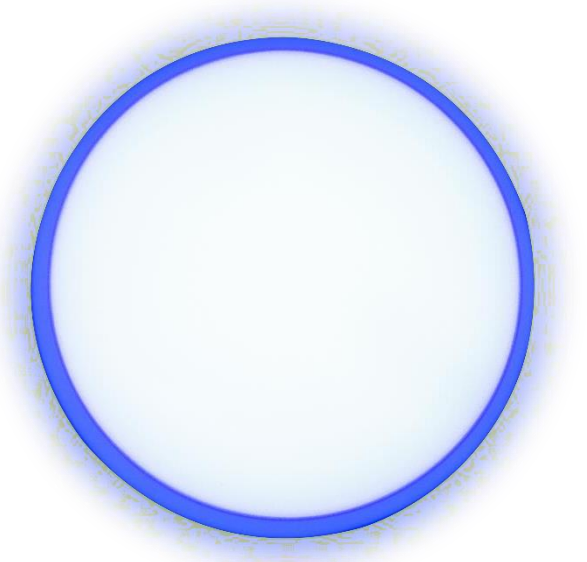

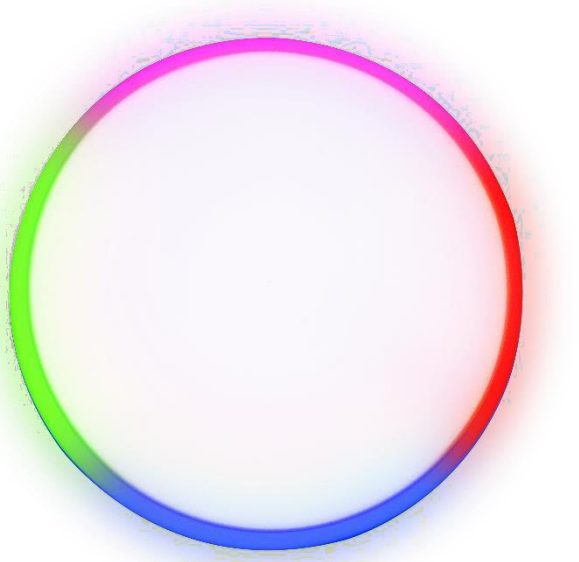

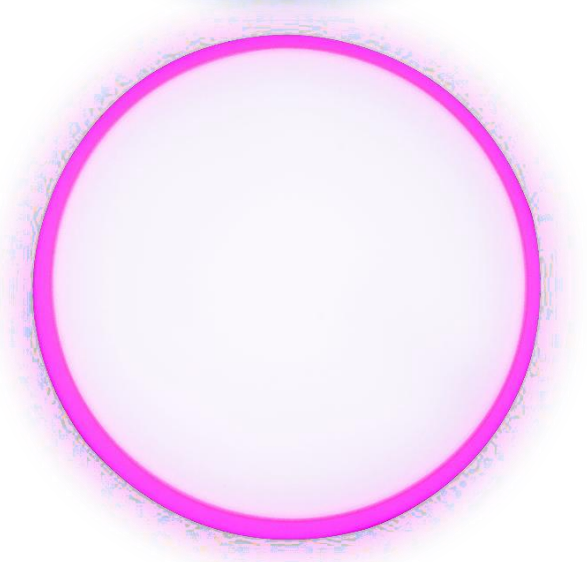

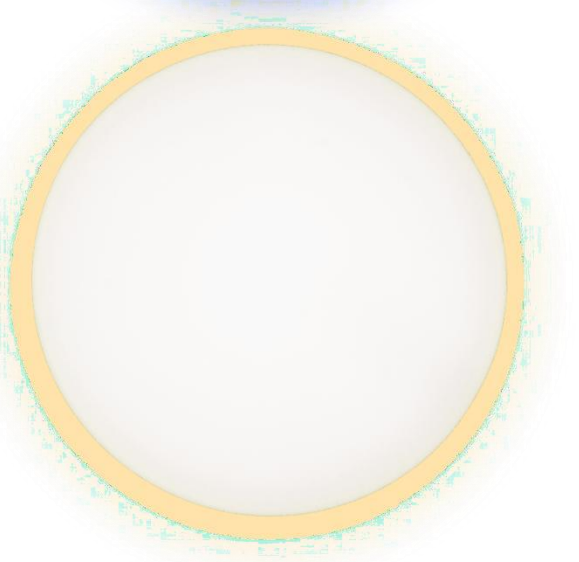

LUMINANCE LUXE SURFACE SRIES 8W

Item: RIMLESS SURFACE PANEL LIGHT

Rated Wattage: 8W

Rated Voltage: 220-240 Vac

Surge Protection: >4.0KV


Lumen Efficacy: 100lm/W

Power Factor: >0.90

CRI: >80

(Carton.Qty) (40)



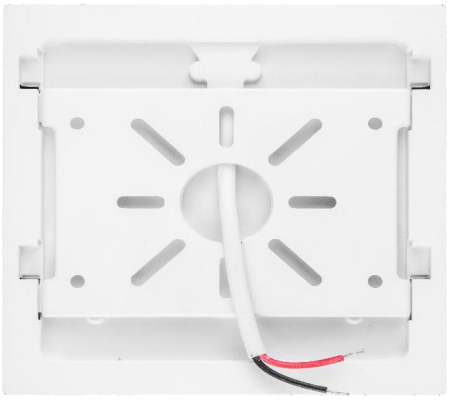

LUMINANCE LUXE SURFACE SRIES 15W

Item: RIMLESS SURFACE PANEL LIGHT

Rated Wattage: 15W

Rated Voltage: 220-240 Vac

Surge Protection: >4.0KV


Lumen Efficacy: 100lm/W

Power Factor: >0.90

CRI: >80

(Carton.Qty) (40)



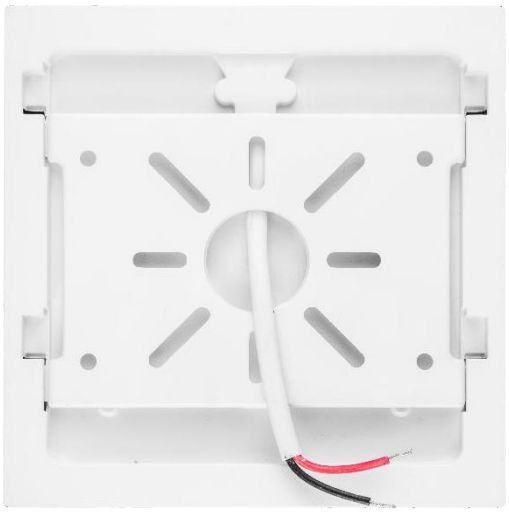

LUMINANCE LUXE SURFACE SRIES 20W

Input Power20W±10%

Input Voltage (V) 220V-240V AC

Operating Frequancy (Hz) 50Hz

Power Factor>0.9

Lumen80Lm/W*

Operating Voltage 100V-300Vac

(Carton.Qty) (20)



LUMINANCE LUXE SURFACE SRIES 22W

Item: RIMLESS SURFACE PANEL LIGHT

Power : 22W

Lumen Efficacy : 100 Lm/W

Operating Voltage : 160-300Vac

Rated Voltage : 220-240Vac


Frequency : 50Hz

Power Factor : ≥0.90

Surge Protection : 24KV

(Carton.Qty) (20)



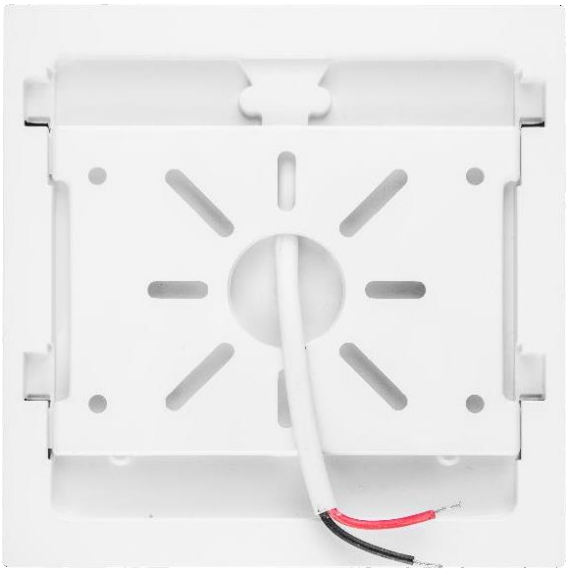

6+6 LED Panel Light

Power : 6+6W

Lumen Efficacy : 70 lm/W

Operating Voltage : 100-300VAC


Rated Voltage : 220-240VAC

Rated Frequency: 50Hz


Power Factor : >0.95

Surge Protection : 2.5KV

(Carton.Qty) (40)

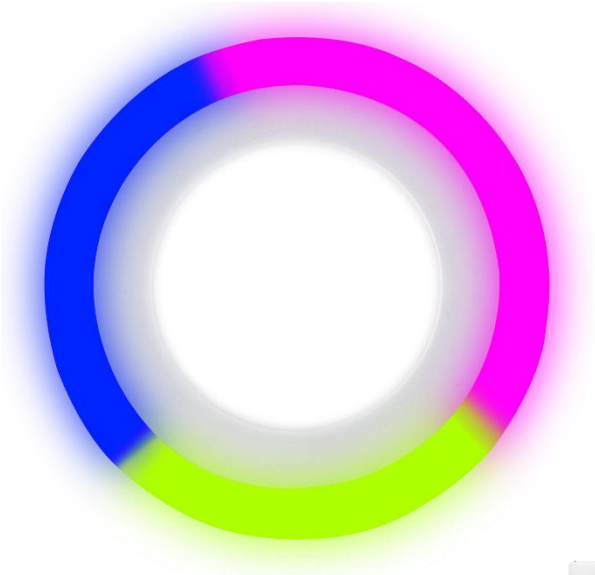



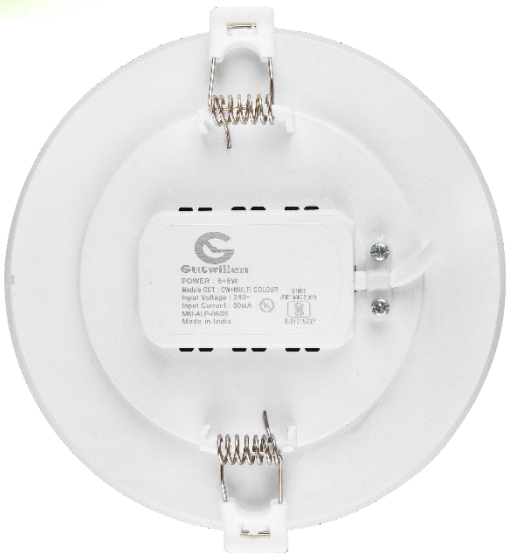

6+6 LED Surface Light

Power : 6+6W

Lumen Efficacy : 70 lm/W

Operating Voltage : 100-300VAC


Rated Voltage : 220-240VAC


Rated Frequency: 50Hz

Power Factor : >0.95

Surge Protection : 2.5KV

(Carton.Qty) (40)

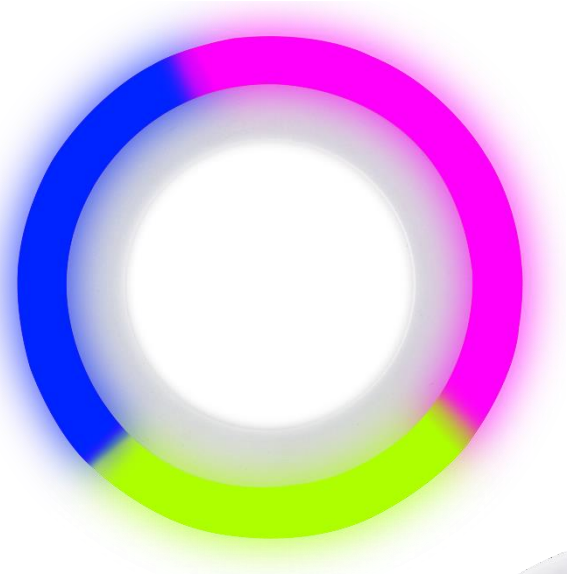

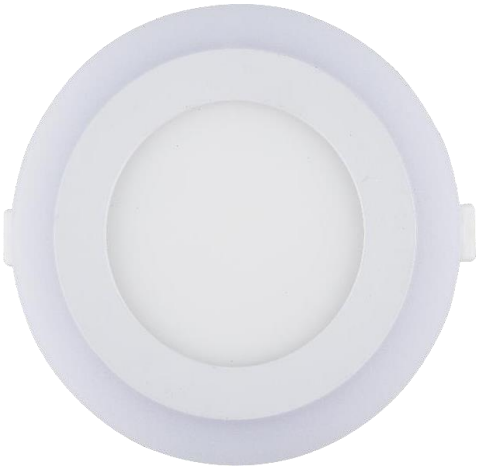



Lumina Sphere Surface Down Light 7W

Item: PC Surface Down Light

Input Power: 7W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 700 lm*

Power Factor : >0.9

CRI : >80

IP Grade : IP20

Beam Angle : 120°

Surge Protection : 4.0kV

Dimension : 85X47 mm

(Carton.Qty) (40)





Lumina Sphere Surface Down Light 9W

Item: PC Surface Down Light

Input Power: 9W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 900 lm*

Power Factor: >0.9

CRI : >80

IP Grade : IP20

Beam Angle: 120°

Surge Protection : 4.0kV

Dimension : 110X46 mm

(Carton.Qty) (40)







Lumina Sphere Surface Down Light 15W

Item: PC Surface Down Light

Input Power: 15W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 1500 lm

Power Factor: >0.9

CRI : 280

IP Grade : IP20

Beam Angle:1200

Surge Protection: 4.0kV

Dimension : 150X48 mm

(Carton.Qty) (40)





LUMINALITE PANEL SERIES 12W

Item: LUMINALITE PANEL SERIES

Rated Wattage: 12W

Rated Voltage: 220-240 Vac

Surge Protection: >4.0KV

Lumen Efficacy: 100lm/W

Power Factor: >0.95

CRI: >80
(Carton.Qty) (30)



Innolite Series Panel 12W

Item: LED PANEL LIGHT

Rated Wattage: 12W

Rated Voltage: 220-240 Vac

Surge Protection : ≥4.0KV

Lumen Efficacy: 80lm/W

Power Factor: ≥0.90

CRI: 280

(Carton.Qty) (20)



Innolite Series Light 18W

Item: LED PANEL LIGHT

Rated Wattage: 18W

Rated Voltage: 220-240 Vac

Surge Protection: ≥4.0KV

Lumen Efficacy: 80lm/W

Power Factor: ≥0.90

CRI: ≥80

(Carton.Qty) (20)



Dynamic Radiance Pro Series Panel 8W

Item: LED PC PANEL LIGHT

Rated Wattage: 8W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: ≥4.0KV

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (40)



Dynamic Radiance Pro Series Panel 8W

Item: LED PC PANEL LIGHT

Rated Wattage: 8W 3 IN 1

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: ≥4.0KV

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (40)



Dynamic Radiance Pro Series Panel 15W

Item: LED PC PANEL LIGHT

Rated Wattage: 15W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: ≥4.0KV

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (20)



Dynamic Radiance Series Panel 8W

Power : 8W

Lumen Efficacy : 80 Lm/W

Operating Voltage : 100-300Vac

Rated Voltage : 220V-240V

Frequency : 50Hz

Power Factor : ≥0.95

Surge Protection : ≥4.0KV

(Carton.Qty) (40)





Dynamic Radiance Series Panel 12W

Item: LED PC PANEL LIGHT

Rated Wattage: 12W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: ≥4.0KV

Lumen Efficacy: 90lm/W Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (20)



Dynamic Radiance Series Panel 15W

Item: LED PC PANEL LIGHT

Rated Wattage: 15W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: ≥4.0KV

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (30)



Dynamic Radiance Series Panel 20W

Item: LED PC PANEL LIGHT

Rated Wattage: 20W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: 24.0KV

Lumen Efficacy: 90lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280

(Carton.Qty) (20)



Stella Series Panel 10W

Rated Wattage: 10W

Frequency: 50Hz

Input Voltage Range: 100V-300VAC

Power Factor: >0.9

Luminous Efficacy: 100lm/Watt

THD: <20%

Surge Protection: 4.0 KVA

CRI:>75

Operating Temp.: -10°C~50°°C

(Carton.Qty) (40)



Strella Series Panel Light 15W

Rated Wattage : 15W

Frequency : 50Hz

Input Voltage Range : 100V-300VAC

Power Factor : >0.9.

Luminous Efficacy : 100lm/Watt

THD : <20%

Surge Protection : 4.0 KVA

CRI : >75

Operating Temp. :-10°C~50°C

(Carton.Qty) (20)



Strella Series Panel 20W

Rated Wattage : 20W

Frequency : 50Hz

Input Voltage Range : 100V-300VAC

Power Factor : >0.9.

Luminous Efficacy : 100lm/Watt

THD : <20%

Surge Protection : 4.0 KVA

CRI : >75

Operating Temp. : -10 C-50

(Carton.Qty) (20)



G-BI+TONE
Adjustable Panel 12W

ItemG -BI-TONE Adjustable Panel
Input Power 12W
Operating Voltage240VAC/50Hz
Operating Temperature10°C to 45°C
LumensUp to 95 lm/W
Power Factor >0.90
Qty 1Number

(Carton.Qty) (40)



G-BI+TONE
Adjustable Panel 6W

Item G-BI-TONE Adjustable Panel
Input Power 6W
Operating Voltage 240VAC/50Hz
Operating Temperature -10°C to 45°C
Lumens up to 95 lm/W
Power Factor >0.90
Qty 1Number

(Carton.Qty) (40)



Commercial Pane Light 48W

LED Square 2x2 Panel Light 48W

(Carton.Qty) (6)





(Carton.Qty) (10)

Driver 5AMP

Item : PULSE SLIM SMPS

AMP: 5 AMP

Wattage: 60W

(Carton.Qty) (40)





Driver 10 AMP

Item : PULSE SLIM SMPS

AMP : 10 AMP

Wattage: 120W

(Carton.Qty) (40)



Driver 25 AMP


Item: PULSE SLIM SMPS

AMP : 25 AMP

Wattage:300W

(Carton.Qty) (20)



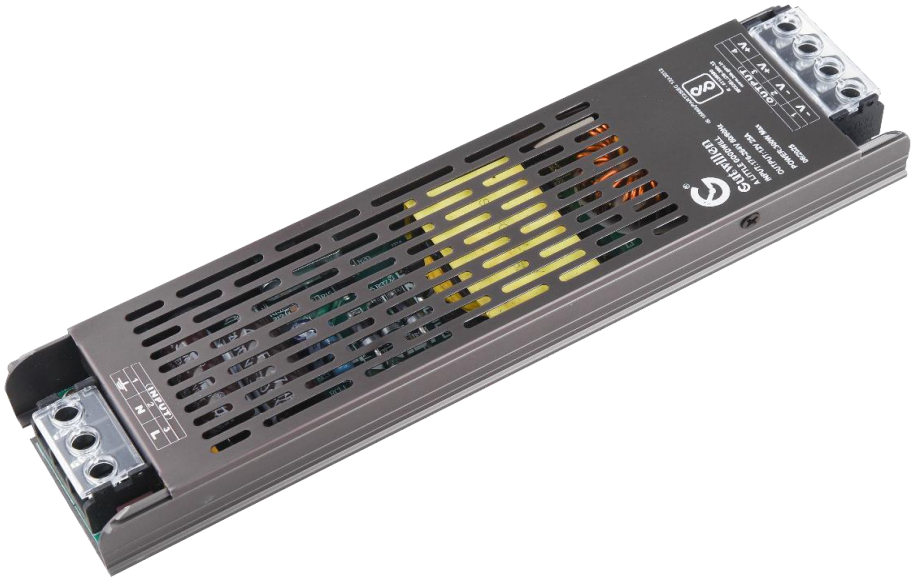

G-POWERDOME SERIES Highbay Light 100W

Power : 100W

Lumea Efficiency: 100 Lumen/W

Rated Voltage: 220V-240V

Rated Frequency : 50Hz

Power Factor : ≥0.9

Surge Irotection : ≥6.0 KV

(Carton.Qty) (5)



LUMINA CORE SERIES Cob 12W

Item Name : Cob Light

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥80

(Carton.Qty) (20)





Lumina Core Led Spot Light, CYLINDER 12W

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥80

(Carton.Qty) (20)



Lumina Core Led Spot Light, Ring CYLINDER 12W

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥80

(Carton.Qty) (20)



LUMOGLASS SERIES

MOVABLE CYLINDER 12W

Power 12W

Lumen Output 1200 lm

Lumen Efficiency 100 lm/Watt

Operating Voltage 90-300 Volt

Operating Frequency 50/60 Hz

CRI : ≥80

Quality : 1 N

(Carton.Qty) (20)



LUMOGLASS SERIES

MOVABLE CYLINDER 18W

Power : 18W

Lumen Output : 1800 lm/W

Lumen Efficiency : 100 lm/Watt

Operating Voltage: 90-300 Volt

Operating Frequency : 50/60 Hz

Quality: 1 N

(Carton.Qty) (20)



G-FORMORA SERIES CYLINDER 12W

Power12W

Lumen Output: 1200 lm/W
Lumen Efficiency: 100 lm/Watt
Operating Voltage: 90-300 Volt
Operating Frequency:50/60 Hz

(Carton.Qty) (20)



G-FORMORA SERIES CYLINDER 18W


Power: 18W

Lumen Output: 1800 lm/W
Lumen Efficiency: 100 lm/Watt
Operating Voltage: 90-300 Volt
Operating Frequency: 50/60 Hz
(Carton.Qty) (20)



Cyloaura SERIES
12W Ring Cylinder

Rated Wattage12W
Frequency50Hz
Input Voltage Range85V-265VAC
Power Factor>0.5
Luminous Efficacy100lm/Watt
THD<20%
Surge Protection4.0 KVA
CRI>80
Operating Temp.-10°C~50°C
(Carton.Qty) (50)

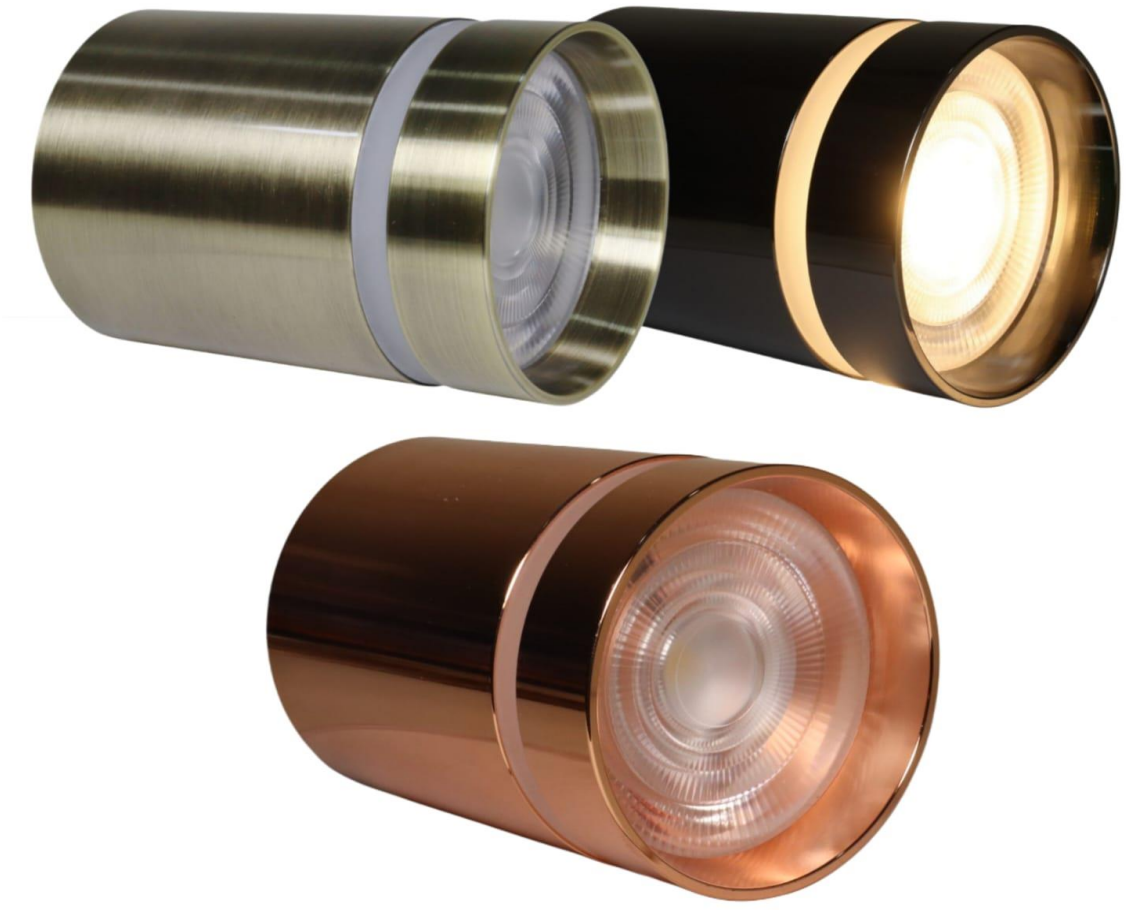

RADIANCECRAFT COLLECTION SPOT LIGHT 7W

Item: RADIANCECRAFT COLLECTION

Watt : 7W

Voltage: 440

Surge Protection : 2.5KV

Lumen:110lm/W

Efficacy:70%

Power Factor : 20.90

CRI : ≥80

(Carton.Qty) (50)









RADIANCECRAFT COLLECTION COB SPOT LIGHT

tem: RADIANCECRAFT COLLECTION

Watt : 12W

Voltage : 440

Surge Protection : 4KV

Lumen: 110lm/W

Efficacy: 70%

Power Factor: 20.90

CRI : >80

(Carton.Qty) (40)





VERSABEAM SERIES SPOT LIGHT 12W

Item: VERSABEAM SERIES

Watt : 12W

Voltage : 440

Surge Protection : 4KV

Lumen: 110lm/W

Efficacy: 70%

Power Factor: >0.90

CRI : >80

(Carton.Qty) (40)



AXORA SERIES COB 12W

Power: 12W

Lumen Output: 1200 lm
Lumen Efficiency: 100 lm/Watt
Operating Voltage: 90-300 Volt
Operating Frequency: 50/60 Hz
CRI: >80

(Carton.Qty) (40)



AXORA SERIES COB 18W

Power: 18W

Lumen Output: 1800 lm
Lumen Efficiency: 100 lm/Watt
Operating Voltage: 90-300 Volt
Operating Frequency: 50/60 Hz
CRI: >80

(Carton.Qty) (20)



BRONVELA SERIES COB 12W

Power: 12W

Lumen Output: 1200 lm
Lumen Efficiency: 100 lm/Watt
Operating Voltage: 90-300 Volt
Operating Frequency: 50/60 Hz
CRI: ≥80

(Carton.Qty) (20)



BRONVELA SERIES COB 18W

Power: 18W

Lumen Output: 1800 lm
Lumen Efficiency: 100 lm/Watt
Operating Voltage:90-300 Volt
Operating Frequency: 50/60 Hz
CRI: ≥80

(Carton.Qty) (20)



SPOT Down Light 3W COB

(Carton.Qty) (100)







Illuminate 240 Pro Strip

Item Name : Illuminate 240 Pro : Pure Copper Edition

Item : 2835 / 10mm / 240D

Voltage : 12V

Colour – 3000K / 4000K / 6500K / ICE BLUE

QTY – 10 Meter/Roll


(Carton.Qty) (20)






LED Strip Light Optibeam 240 L Series 10 MM

(Carton.Qty) (60)

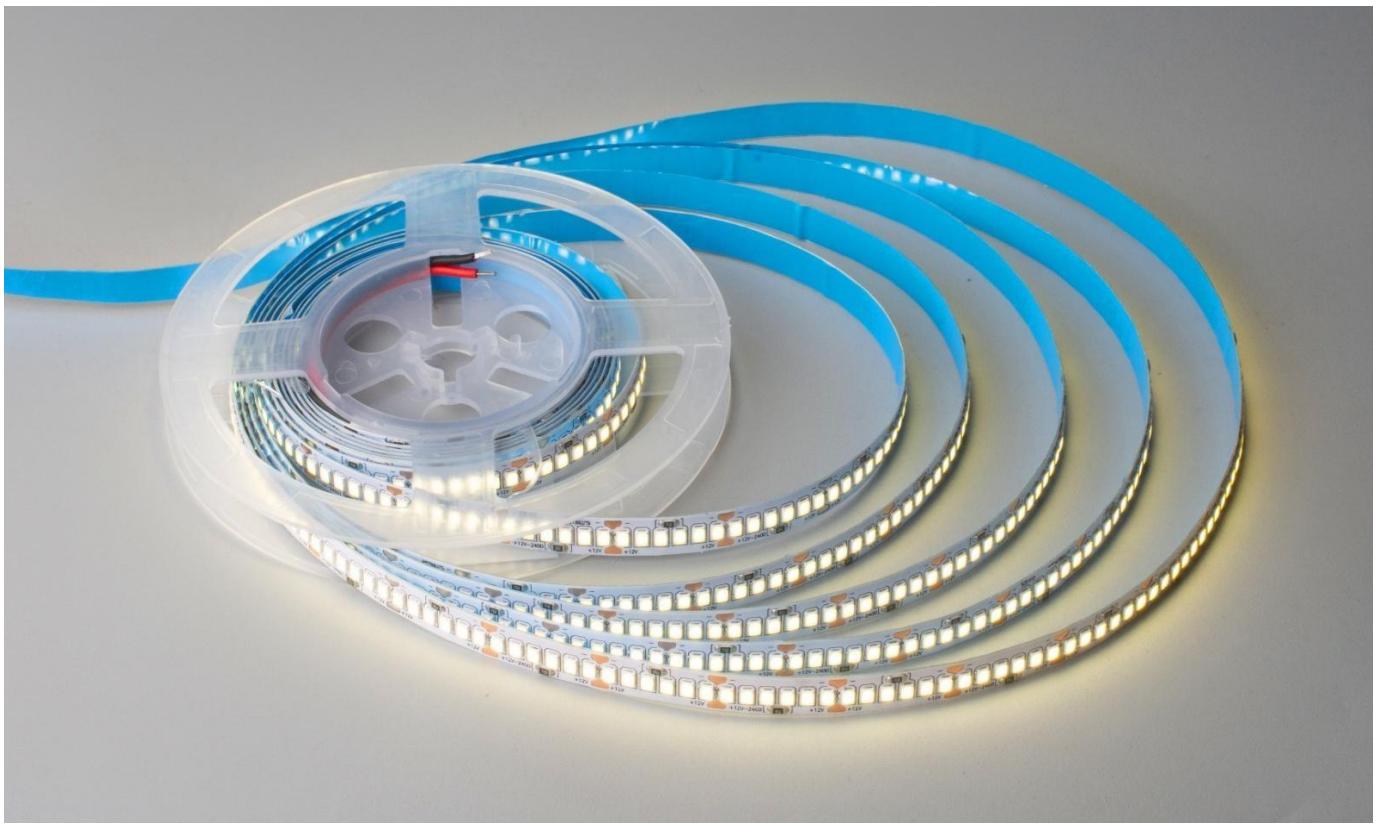

Brightbase LED Strip Light 8 MM 240L

(Carton.Qty) (100)

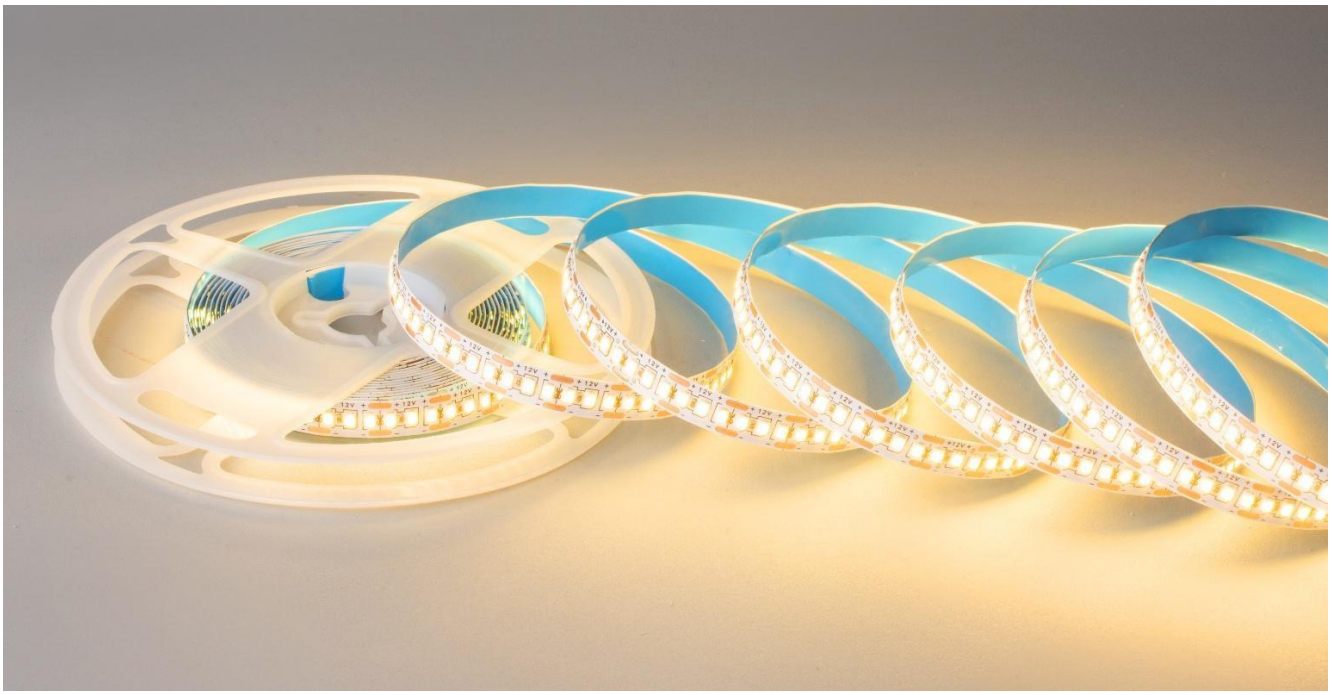

Bright Edge Series, LED Bulb 9W

Power : 9W

Lumen Efficacy : 105 Lumen/watt

Operating Voltage : ≥100-300 Vac

Rated Voltage : 220-240 Vac

Rated Frequency : 50 Hz

Power Factor : ≥20.9

Surge Protection : ≥24.0 KV

Base Cap : B22

(Carton.Qty) (100)



Precision Glow Series _ Emergency bulb 10W

Power : 10W

Operating Voltage : 100-300 Vac

Rated Voltage : 220-240 Vac

Input Frequency : 50Hz

Power Factor : ≥ 0.95

Charging Mode : Auto

Charging Time : 8-10 Hrs

Lumen Efficacy (lm/W) : 100

Surge Protection : 4KV

CRI : ≥ 80

Operating Temp. Range (°C) : -10 to + 45

Housing Type : PC

(Carton.Qty) (50)



Bright Edge Series, LED Bulb 12W

Power: 12W

Operating Voltage: 100-300Vac
Rated Voltage: 220-240Vac
Frequency: 50Hz
Power Factor: >0.9
lumen Efficacy: 105 Lm/W
Surge Protection: >4KV
Dimensions:63x119mm
Housing Type: PC
Base Cap: B-22

(Carton.Qty) (100)



Bright Edge Series, LED Bulb 15W

Power: 15W

Operating Voltage: 100-300Vac
Rated Voltage: 220-240Vac
Frequency: 50Hz
Power Factor: >0.9
lumen Efficacy: 105 Lm/W
Surge Protection: >4KV
Dimensions:70x132mm
Housing Type: PC
Base Cap: B-22

(Carton.Qty) (50)



Bright Edge Series, LED Bulb 18W

Power: 18W

Operating Voltage: 100-300Vac
Rated Voltage: 220-240Vac
Frequency: 50Hz
Power Factor: >0.9
lumen Efficacy: 105 Lm/W
Surge Protection: >4KV
Dimensions:80x147mm
Housing Type: PC
Base Cap: B-22

(Carton.Qty) (40)



Bright Edge Series, LED Bulb 20W

Power: 20W

Operating Voltage: 100-300Vac
Rated Voltage: 220-240Vac
Frequency: 50Hz
Power Factor: >0.9
lumen Efficacy: 105 Lm/W
Surge Protection: >4KV
Dimensions:80x140mm
Housing Type: PC
Base Cap: B-22

(Carton.Qty) (40)



Bright Edge Series, LED Bulb 30W

Power : 30W

Lumen Efficacy : 100 Lm/W

Operating Voltage : 100-300Vac

Rated Voltage : 220-240Vac

Frequency : 50Hz

Power Factor : ≥0.90

Surge Protection : ≥4.0KV

(Carton.Qty) (20)



Bright Edge Series, LED Bulb 50W

Power : 50W

Lumen Efficacy : ≥100 Lumen/watt

Operating Voltage : 100-300 Vac

Rated Voltage : 220-240 Vac

Rated Frequency : 50 Hz

Power Factor : ≥0.9

Surge Protection : ≥4.0 KV

Base Cap : B22

(Carton.Qty) (20)



G-AXION Series-T30

COMMODITY G-AXION SERIES-T30

INPUT POWER : 30W

OPERATING VOLTAGE: 160-300 VAC/50Hz

LUMENS 3150 lm

OPERATING TEMP 10°C TO 45°C

POWER FACTOR 0.9

CRI 280

DIMENSION 295x110 mm

IP GRADE IP20

SURGE PROTECTION4.0kV

BODY

PBT

(Carton.Qty) (24)



G Visionedge Series, LED Street Light 30W

Item Name : LED Street Light

Input Power : 30w

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 3300lm

Power Factor > 0.95

CRI : >80

Start Mode : Instant Start

IP Rating : IP-66

(Carton.Qty) (20)



G Visionedge Series, LED Street Light 50W

Item Name : LED Street Light

Input Power : 50w

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 5500lm

Power Factor > 0.95

CRI : >80

Start Mode : Instant Start

IP Rating : IP-66

(Carton.Qty) (20)



G Visionedge Series, LED Street Light 100W

Item Name :Led Street Light
Input Power : 100W
Operating Volatage : 85-300VAC/50Hz
Operating Temp: -10^{0}C to + 50^{0}C
Lumen : 11000Im
Power Factor : >0.95
CRI : >80
Start Mode : Instant Start
IP Rating : IP 66
(Carton.Qty) (10)



(Carton.Qty) **(10)**

G-Luxline 5 way Led Liner Light

Model : G-Luxline

Power : 10W

Lumen Output : 1000 Im

Lumen Efficiency : 100 Im/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥80

(Carton.Qty) (50)



Stellar Beam SMD

Product Name : SMD Wireless Rope Light

LED Quantity : 120

Product Voltage : 220V

Packing Details : 50 MTR.

Carton Size : 305 x 108 x 305 mm

(Carton.Qty) (3)



Bharat Beam Series

Generic Name: LED Rope Light

Model: Bharat Beam

LED Type: 2835 SMD

Rated Voltage: 220V~

LED/MTR: 120 LED/MTR

IP Rating: IP65

Length: 18 Meter/Roll

CCT: Tricolor

(Carton.Qty) (10)



Lumoglass Series

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI: ≥80

(Carton.Qty) (20)



Quadcurve Series

Power: 12W

Lumen Output : 100 lm/W

Lumen Efficienc : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

(Carton.Qty) (20)





G-FUSION AURA

Power : 8W

Lumen Efficiency : 50 Lumen/watt

Rated Voltage : 220V-240V

Rated Frequency : 50-60 Hz

Power Factor : ≥0.5Surge Protection : >2.5 KV

(Carton.Qty) (20)



G-CRAFT GLOW

Power : 8W

Lumen Efficiency : 70 Lumen/watt

Rated Voltage : 220V-240V

Rated Frequency : 50-60 Hz

Power Factor : 20.5

Surge Protection : 22.5 KV

(Carton.Qty) (20)



G-1U+1D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-1U+1D-I-EDGE
Input Power: 2W
Operating Voltage: 150-260VAC/50Hz
Operating Temperature: -10°C to 45°C
Lumens: 200 Lm*
Power Factor: >0.6
CRI: >80
IP Grade: IP65
Beam Angle:24°
Surge Protection: 4.0kv
Dimension:78x85x38 mm
Qty: 1 Numbe

(Carton.Qty) (40)



G-2U+2D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-2U+2D-I-EDGE
Input Power: 4W
Operating Voltage: 150-260VAC/50Hz
Operating Temperature: -10°C to 45°C
Lumens: 400 Lm*
Power Factor: >0.6
CRI: >80
IP Grade: IP65
Beam Angle : 249
Surge Protection: 4.0kv
Dimension: 119x78x40 mm
Qty1 Numbe

(Carton.Qty) (40)



G-3U+3D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-3U+3D-I-EDGE
Input Power: 6W
Operating Voltage: 150-260VAC/50Hz
Operating Temperature: -10°C to 45°C
Lumens: 600 Lm*
Power Factor: >0.9
CRI: ≥80
IP Grade: IP65
Beam Angle240
Surge Protection: 4.0kv
Dimension: 167x78x45 mm
Qty: 1 Number

(Carton.Qty) (40)



G-4U+4D-I-EDGE

Up-Down Edge. Perfect Balance.

Item:G-4U+4D-I-EDGE
Input Power: 8W
Operating Voltage: 150-260VAC/50Hz
Operating Temperature-10°C to 45°C
Lumens: 800 Lm*
Power Factor: >0.9
CRI: >80
IP Grade: IP65
Beam Angle: 240
Surge Protection: 4.0kv
Dimension: 208X78X45mm
Qty: 1 Number

(Carton.Qty) (20)



G-ASYMMETRIC PRO ½ K

"Single Side Throw. Smarter Glow."

Item PRO G-ASYMMETRIC 12K

Input Power:3W

Operating Voltage: 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 240 Lm

Power Factor: >0.90

CRIIP Grade:>80

Luminaire Angle: IP65

Surge Protection: 120°

Dimension: 4.0kv: 53x52x43 mm
(Carton.Qty) (40)



G-BIAXIAL PRO K LIGHT

Biaxial Optics.Balanced Illumination.

Item PRO G-BIAXIAL K LIGHT
Input Power:6W
Operating Voltage: 220-240VAC/50Hz
Operating Temperature: -10°C to 45°C
, Lumens: 480 Lm
Power Factor:>0.6
CRIIP Grade:280
Beam Angle24°: Ip65
Surge Protection4.0kv
Dimension:90x52x43 mm
(Carton.Qty) (40)



G-ASYMMETRIC ½ K

"Single Side Throw. Smarter Glow."

Item: G-ASYMMETRIC
Input Power:3W
Operating Voltage: 220-240VAC/50Hz
Operating Temperature: -10°C to 45°C
Lumens: 300 Lm
Power Factor: >0.6
CRI: >80
IP Grade: Ip65
Beam Angle:24°
Surge Protection: 4.0kv
Dimension: 71x80x61 mm
Qty: 1Number

(Carton.Qty) (40)



G-BIAXIAL K LIGHT

Biaxial Optics.Balanced Illumination.

Item: G-BIAXIAL K LIGHT
Input Power:6W
Operating Voltage: 220-240VAC/50Hz
Operating Temperature: -10°C to 45°C
Lumens: 600 Lm
Power Factor:>0.6
CRI:>80
IP Grade: Ip65
Beam Angle24°
Surge Protection: 4.0kv
Dimension:142x80x61 mm
Qty: 1Number

(Carton.Qty) (20)



G-QUADSPHERE

Geometry of Light. Poetry of Space.

Item:G-QUADSPHERE
Input Power4w
Operating Voltage: 220-240VAC/50Hz
Operating Temperature: -10°C to 45°C
Power Factor: >0.6
Lumens: 400 Lm
CRI:>80
IP Grade: Ip65
Beam Angle24°
Surge Protection: 4.0kv
Dimension:78x78x47 mm
Qty: 1Number

(Carton.Qty) (40)



G-Recesora Series
Down Light 12W

Power:12W

Lumen Output: 1200 lm

Lumen Efficiency: 100 lm/Watt

Operating Voltage: 90-300 Volt

Operating Frequency: 50/60 Hz

CRI: 280

Quality:1 N

(Carton.Qty) (20)



G-DUOLUX SERIES 7+7

Input power: 7W

Rated Voltage: 220-240V AC, 50Hz

Operating Voltage: 180-300V

Range

Power Factor: ≥ 0.9

Cut Out Dia (0): 50 mm

Lumen*: 570 Im

CRI: > 80

Beam Angle: 120°



D-JACTONE DEEP LIGHT 7W

Wattage:7W

Operating Voltage: 100-300Vac

Rated Voltage: 220-240Vac

Frequency: 50Hz

Power Factor: >0.5

Lumen Efficacy80lm/w

Surge Protection: >2.5KV

Start Mode: Instant Start

Operating Temp. Range: -10 to + 45°C

IP Rating: IP-20

Housing: PC

(Carton.Qty) (40)



D-JACTION SERIES 3W DEEP

Power: 3W

Lumen Output: 225 Im

Lumen Efficiency: 75 lm/Watt

Operating Voltage: 220-240 Volt

Operating Frequency: 50/60 Hz

CRI≥80

(Carton.Qty) (50)



G-PINPOINT III, SERIES
FIX COB LIGHT

(Carton.Qty) (100)



G-PINPOINT SWIVEL III SERIES
MOVEABLE COB LIGHT

(Carton.Qty) (100)



SAFE HOME BUDDY

SERIES

Long Lasting Battery Life

400 mAH Battery

Large Coverage Triplex Net

with 3600 V DC Discharge on Use For Best Effectiveness

Aesthetic & Ergonomic Design.90

Build With High Grade ABS

Material Giving More Durabilityisrito bine aso & Strength

(Carton.Qty) (24)



Gutwillen

A LITTLE GOODWILL

