



Gutwillen

WE SERVE TRUST



Grammy Series LED Flood Light 200W

Item Name : Gutwillen LED Flood Light

Input Power : 200W

Operating Volatage : 100-300VAC/50Hz

Operating Temp. : -10°C to 60°C

Lumen : 22000lm

Power Factor : >0.95

CRI : >80

Beam Angle : 120°

Dimension : 315x336x72mm



Grammy 100W

Item Name: Gutwillen Led Flood Light

Power: 100W

Input Power: 100W

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen : 11000lm

Power Factor: >0.95

CRI: >80

Beam Angle: 120°

Dimension: 275x285x64mm



Grammy Pro Series 100W

Item Name : Gutwillen Led Flood Light

Power: 100W

Input Power : 100W

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen: 10000lm

Power Factor : >0.95

CRI: >80

Beam Angle : 120°

Dimension : 223x227x49mm

IP 66



Grammy Series 50W

Item Name : Gutwillen Led Flood Light

Power : 50w

Input Power : 50w

Operating Volatage : 100-300VAC/50Hz

Operating Temp.: -10°C to 60°C

Lumen: 5500lm

Power Factor: >0.95

CRI: >80

Beam Angle: 120°

Dimension: 223x227x49mm

PI : 66



Grammy Pro Series 50W

Item Name : Gutwillen LED Flood Light

Input Power : 50w

Operating Volatage: 100-300VAC/50Hz

Operating Temp. :-10°C to 60°C

Lumen : 5500lm

Power Factor : >0.95

CRI : >80

Beam Angle : 120"

Dimension : 182x182x42mm



Econoray Series 200W

Item Name : Gutwillen Led Flood Light

Power: 200W

Input Power: 200W

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 22000lm

Power Factor : >0.95

CRI : >80

Start Mode: Instant Start

IP Rating : IP-66



Econoray Series 100W

Item Name : Gutwillen Led Flood Light

Power: 100w

Input Power: 100w

Operating Volatage: 85-300VAC/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 11000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating : IP-66



Econoray Series 50W

Item Name : Gutwillen Led Flood Light

Power: 50w

Input Power: 50w

Operating Volatage: 85-300VAC/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 5500lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66



Kleinmeister Series 100W

Item Name : Gutwillen Led Flood Light

Power : 100W

Input Power : 100W

Operating Volatage: 85-300Vac/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 10000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66



Kleinmeister Series 50W

Item Name : Gutwillen Led Flood Light

Power : 50W

Input Power : 50W

Operating Volatage: 85-300Vac/50Hz

Operating Temp.: -10°C to +50°C

Lumen: 5000lm

Power Factor: >0.95

CRI: >80

Start Mode: Instant Start

IP Rating: IP-66



Octaglow Concealed 8W

Item: PC Concealed Down Light

Watt : 8W

Voltage: 100-300

Surge Protection : >4.0KV

Lumen: 110lm/W

Efficacy: 70%

Power Factor : >0.95

CRI : >80



Luminous Saver 6W

Item: LED CONCEALED LIGHT

Rated Wattage: 6W

Rated Voltage: 220-240 Vac

Surge Protection : $\geq 4.0\text{KV}$

Lumen Efficacy : 80lm/W

Power Factor : >0.90

CRI: >80



Aurale Designer Conceal 7W

Item: COB DOWN LIGHT

Rated Wattage : 7W

Rated Voltage : 220-240Vac

Surge Protection : >4.0KV

Lumen Efficacy : 80lm/W

Power Factor : >0.90

CRI: >80



Radiant Orbicular Striker 5W

Item: Striker led light

Watt : 5W

Voltage: 200-240

Surge Protection : >2.5KV

Lumen: 80lm/W

Power Factor: >0.90

CRI : >80



Glow Sphere Series 5W Striker Light

Item: Striker led light

Watt : 5W

Voltage: 200-240

Surge Protection: >2.5KV

Lumen: 70lm/W

Power Factor: >0.90

CRI : >80



Illuminate Pro 12W Twins 2 in 1

Item : PC Concealed Down Light

Input Power : 12W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature : -10°C to 45°C

Lumens : 1200 lm

Power Factor: >0.9





CRI : ≥80

IP Grade : IP20

Beam Angle : 120°

Surge Protection : 4.0kV

Dimension : 130x72 mm

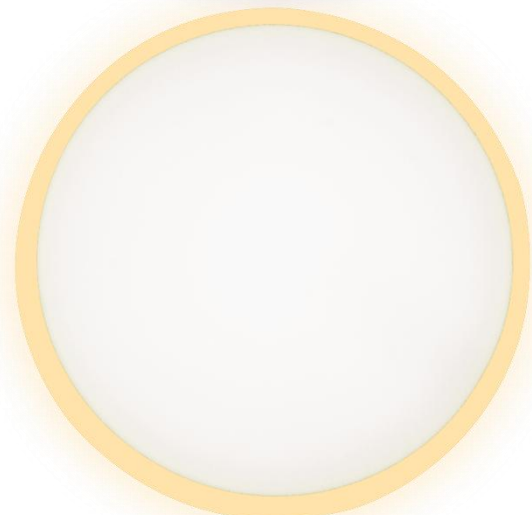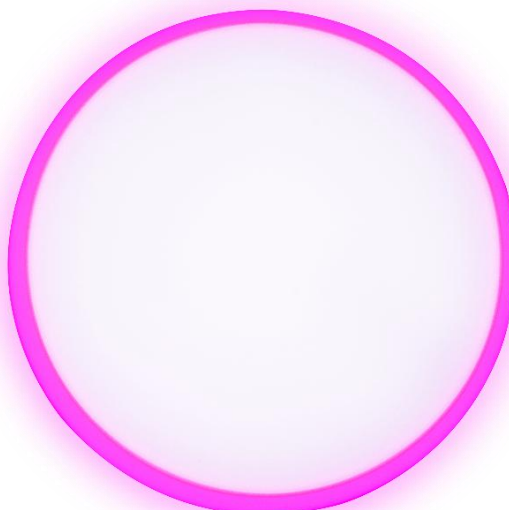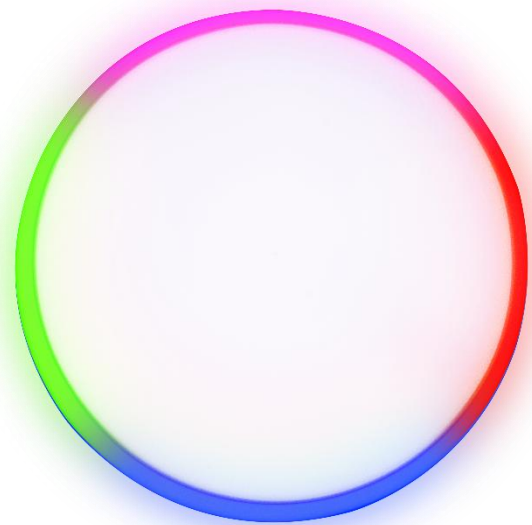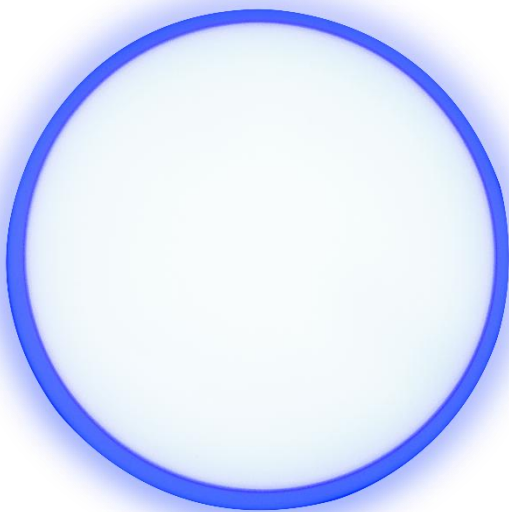

LUMINANCE LUXE SURFACE SRIES 15W

Item: RIMLESS SURFACE PANEL LIGHT

Rated Wattage: 15W


Rated Voltage: 220-240 Vac

Surge Protection: >4.0KV

Lumen Efficacy: 100lm/W

Power Factor: >0.90

CRI: >80

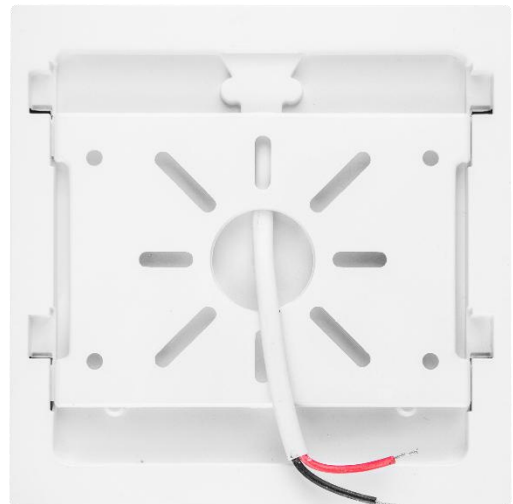

LUMINANCE LUXE SURFACE SRIES 22W

Item: RIMLESS SURFACE PANEL LIGHT

Power : 22W

Lumen Efficacy : 100 Lm/W


Operating Voltage : 160-300Vac

Rated Voltage : 220-240Vac

Frequency : 50Hz

Power Factor : ≥ 0.90

Surge Protection : 24KV

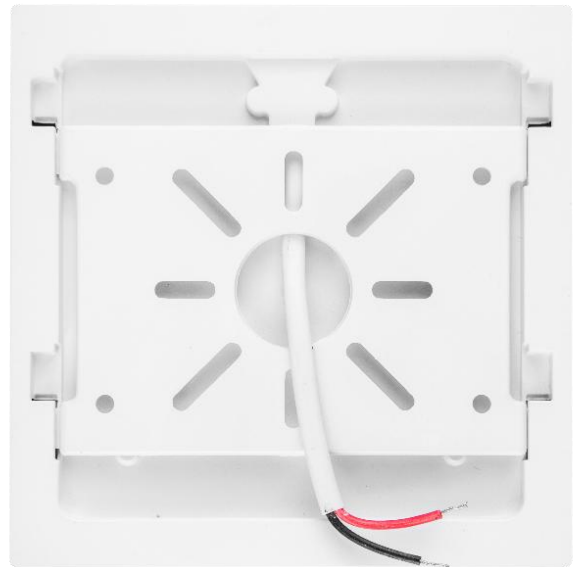

6+6 LED Panel Light

Power : 6+6W

Lumen Efficacy : 70 lm/W



Operating Voltage : 100-300VAC

Rated Voltage : 220-240VAC

Rated Frequency: 50Hz

Power Factor : >0.95

Surge Protection : 2.5KV

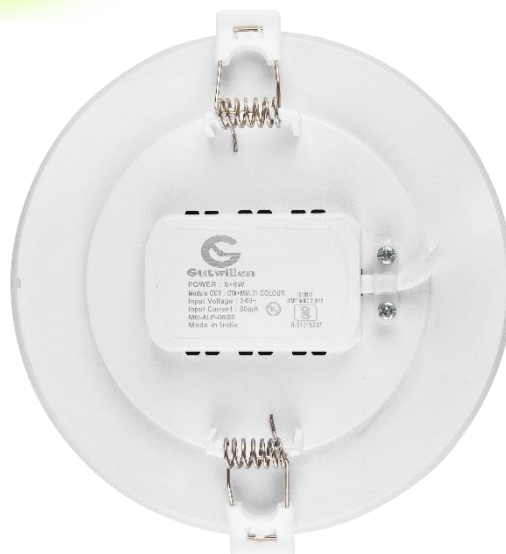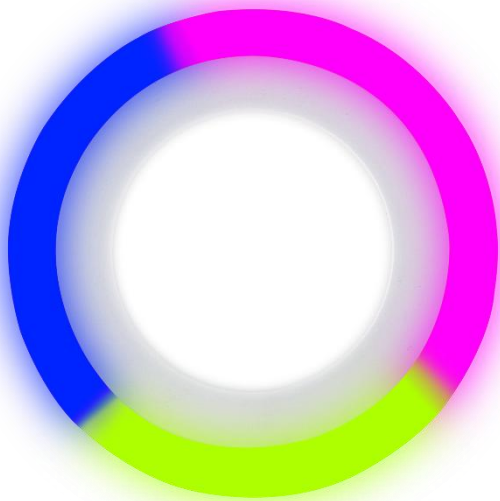

6+6 LED Surface Light

Power : 6+6W

Lumen Efficacy : 70 lm/W



Operating Voltage : 100-300VAC

Rated Voltage : 220-240VAC

Rated Frequency: 50Hz

Power Factor : >0.95

Surge Protection : 2.5KV

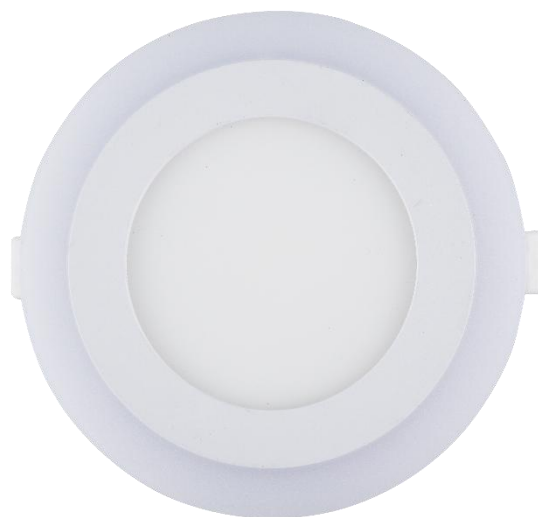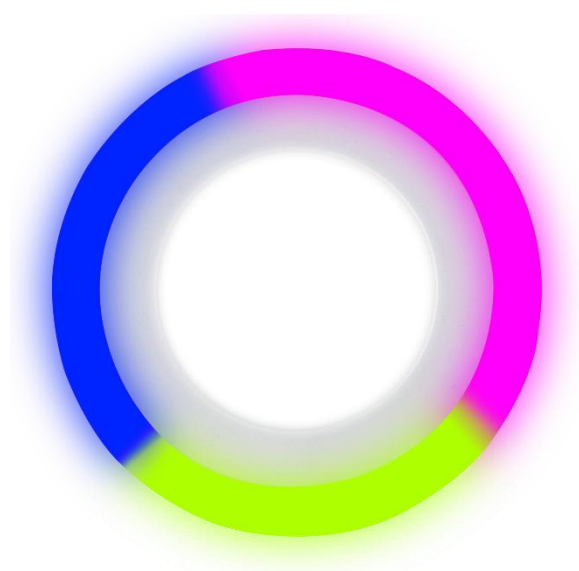

Lumina Sphere Surface Down Light 7W

Item: PC Surface Down Light

Input Power: 7W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 700 lm*

Power Factor : >0.9

CRI : >80

IP Grade : IP20

Beam Angle : 120°

Surge Protection : 4.0kV

Dimension : 85X47 mm



Lumina Sphere Surface Down Light 9W

Item: PC Surface Down Light

Input Power: 9W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 900 lm*

Power Factor: >0.9

CRI : >80

IP Grade : IP20

Beam Angle: 120°

Surge Protection : 4.0kV

Dimension : 110X46 mm



Lumina Sphere Surface Down Light 15W

Item: PC Surface Down Light

Input Power: 15W

Operating Voltage : 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens : 1500 lm

Power Factor: >0.9

CRI : 280

IP Grade : IP20

Beam Angle:120°

Surge Protection: 4.0kV

Dimension : 150X48 mm



LUMINALITE PANEL SERIES 12W

Item: LUMINALITE PANEL SERIES

Rated Wattage: 12W

Rated Voltage: 220-240 Vac

Surge Protection: >4.0KV

Lumen Efficacy: 100lm/W

Power Factor: >0.95

CRI: >80



Innolite Series Panel 12W

Item: LED PANEL LIGHT

Rated Wattage: 12W

Rated Voltage: 220-240 Vac

Surge Protection : $\geq 4.0\text{KV}$

Lumen Efficacy: 80lm/W

Power Factor: ≥ 0.90

CRI: 280



Innolite Series Light 18W

Item: LED PANEL LIGHT

Rated Wattage: 18W

Rated Voltage: 220-240 Vac

Surge Protection: $\geq 4.0\text{KV}$

Lumen Efficacy: 80lm/W

Power Factor: ≥ 0.90

CRI: ≥ 80



Dynamic Radiance Pro Series Panel 8W

Item: LED PC PANEL LIGHT

Rated Wattage: 8W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: $\geq 4.0\text{KV}$

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280



Dynamic Radiance Pro Series Panel 15W

Item: LED PC PANEL LIGHT

Rated Wattage: 15W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: $\geq 4.0\text{KV}$

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280



Dynamic Radiance Series Panel 8W

Power : 8W

Lumen Efficacy : 80 Lm/W

Operating Voltage : 100-300Vac

Rated Voltage : 220V-240V

Frequency : 50Hz

Power Factor : ≥ 0.95

Surge Protection : $\geq 4.0KV$



Dynamic Radiance Series Panel 15W

Item: LED PC PANEL LIGHT

Rated Wattage: 15W

Input Voltage: AC-90-330V. 50/60Hz

Surge Protection: $\geq 4.0\text{KV}$

Lumen Efficacy: 110-120lm/W

Operating Temp.: 10°C to 55°C

Power Factor: 20.90

CRI: 280



Stella Series Panel 10W

Rated Wattage: 10W

Frequency: 50Hz

Input Voltage Range: 100V-300VAC

Power Factor: >0.9

Luminous Efficacy: 100lm/Watt

THD: <20%

Surge Protection: 4.0 KVA

CRI:>75

Operating Temp.: -10°C~50°C



Strella Series Panel Light 15W

Rated Wattage : 15W

Frequency : 50Hz

Input Voltage Range : 100V-300VAC

Power Factor : >0.9.

Luminous Efficacy : 100lm/Watt

THD : <20%

Surge Protection : 4.0 KVA

CRI : >75

Operating Temp. :-10°C~50°C



Strella Series Panel 20W

Rated Wattage : 20W

Frequency : 50Hz

Input Voltage Range : 100V-300VAC

Power Factor : >0.9.

Luminous Efficacy : 100lm/Watt

THD : <20%

Surge Protection : 4.0 KVA

CRI : >75

Operating Temp. : -10 C-50



Commercial Pane Light 48W

LED Square 2x2 Panel Light 48W





G-INSTITUTIONAL | PANEL 1x1 | 24W

GUTWILLEN • We Serve Trust

Driver 5AMP

Item : PULSE SLIM SMPS

AMP: 5 AMP

Wattage: 60W



Driver 25 AMP

Item: PULSE SLIM SMPS

AMP : 25 AMP

Wattage:300W



G-POWERDOME SERIES Highbay Light 100W

Power : 100W

Lumea Efficiency: 100 Lumen/W

Rated Voltage: 220V-240V

Rated Frequency : 50Hz

Power Factor : ≥ 0.9

Surge Irotection : ≥ 6.0 KV



LUMINA CORE SERIES Cob 12W

Item Name : Cob Light

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥ 80



Lumina Core Led Spot Light, CYLINDER 12W

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥ 80



Lumina Core Led Spot Light, Ring CYLINDER 12W

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥ 80



LUMOGLASS SERIES

MOVABLE CYLINDER 12W

Power 12W

Lumen Output 1200 lm

Lumen Efficiency 100 lm/Watt

Operating Voltage 90-300 Volt

Operating Frequency 50/60 Hz

CRI : ≥ 80

Quality : 1 N



LUMOGLASS SERIES

MOVABLE CYLINDER 18W

Power : 18W

Lumen Output : 1800 lm/W

Lumen Efficiency : 100 lm/Watt

Operating Voltage: 90-300 Volt

Operating Frequency : 50/60 Hz

Quality: 1 N



Lumina Core Led Spot Light, Ring Designer

CYLINDER 12W

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥ 80



RADIANCECRAFT COLLECTION SPOT LIGHT 7W

Item: RADIANCECRAFT COLLECTION

Watt : 7W

Voltage: 440

Surge Protection : 2.5KV

Lumen:110lm/W

Efficacy:70%

Power Factor : 20.90

CRI : ≥ 80



RADIANCECRAFT COLLECTION COB SPOT LIGHT

tem: RADIANCECRAFT COLLECTION

Watt : 12W

Voltage : 440

Surge Protection : 4KV

Lumen: 110lm/W

Efficacy: 70%

Power Factor: 20.90

CRI : >80



VERSABEAM SERIES SPOT LIGHT 12W

Item: VERSABEAM SERIES

Watt : 12W

Voltage : 440

Surge Protection : 4KV

Lumen: 110lm/W

Efficacy: 70%

Power Factor: >0.90

CRI : >80



SPOT Down Light 3W COB



Illuminate 240 Pro Strip

Item Name : Illuminate 240 Pro : Pure Copper Edition

Item : 2835 / 10mm / 240D


Voltage : 12V

Colour – 3000K / 4000K / 6500K / ICE BLUE


QTY – 10 Meter/Roll



LED Strip Light Optibeam 240 L Series 10 MM

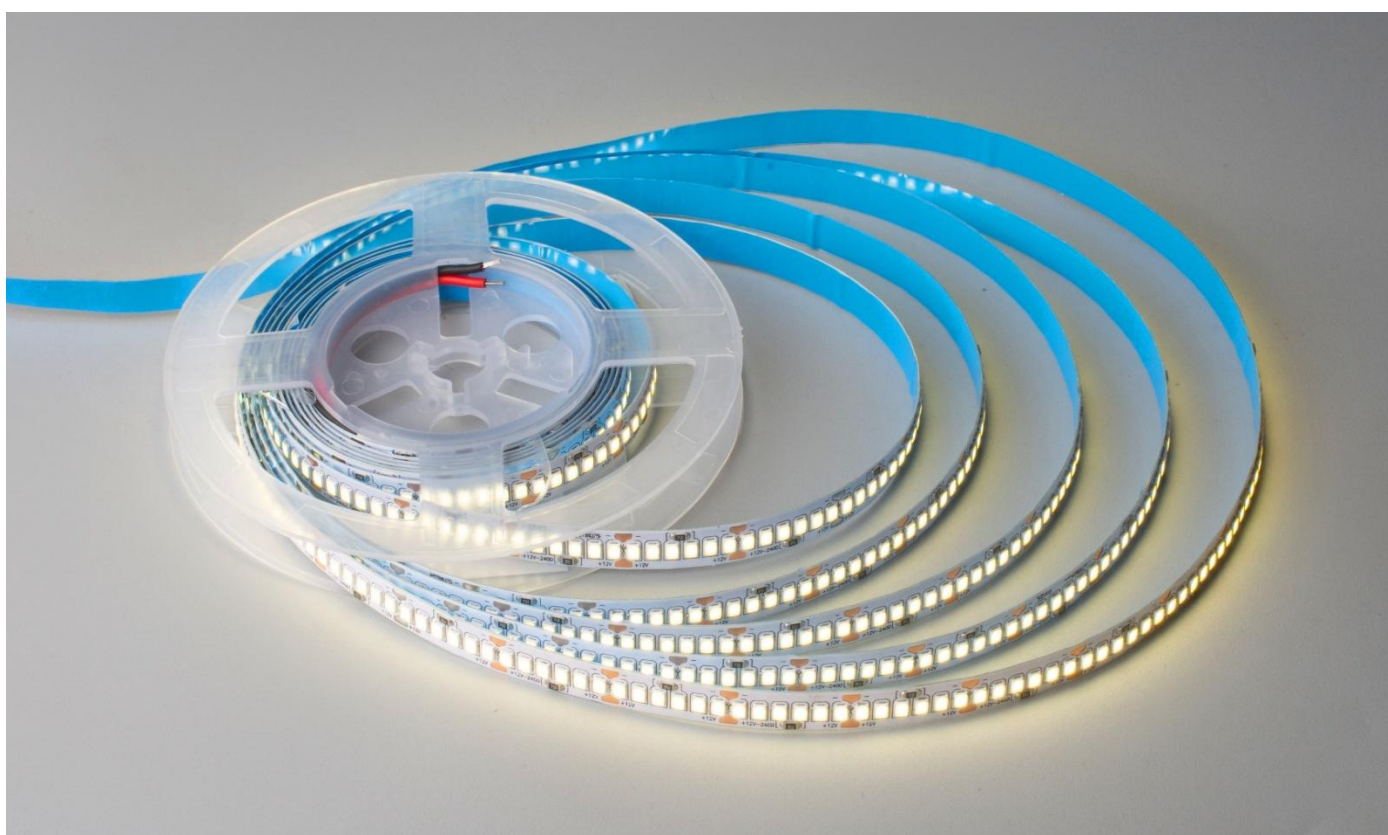

Brightbase LED Strip Light 8 MM 240L

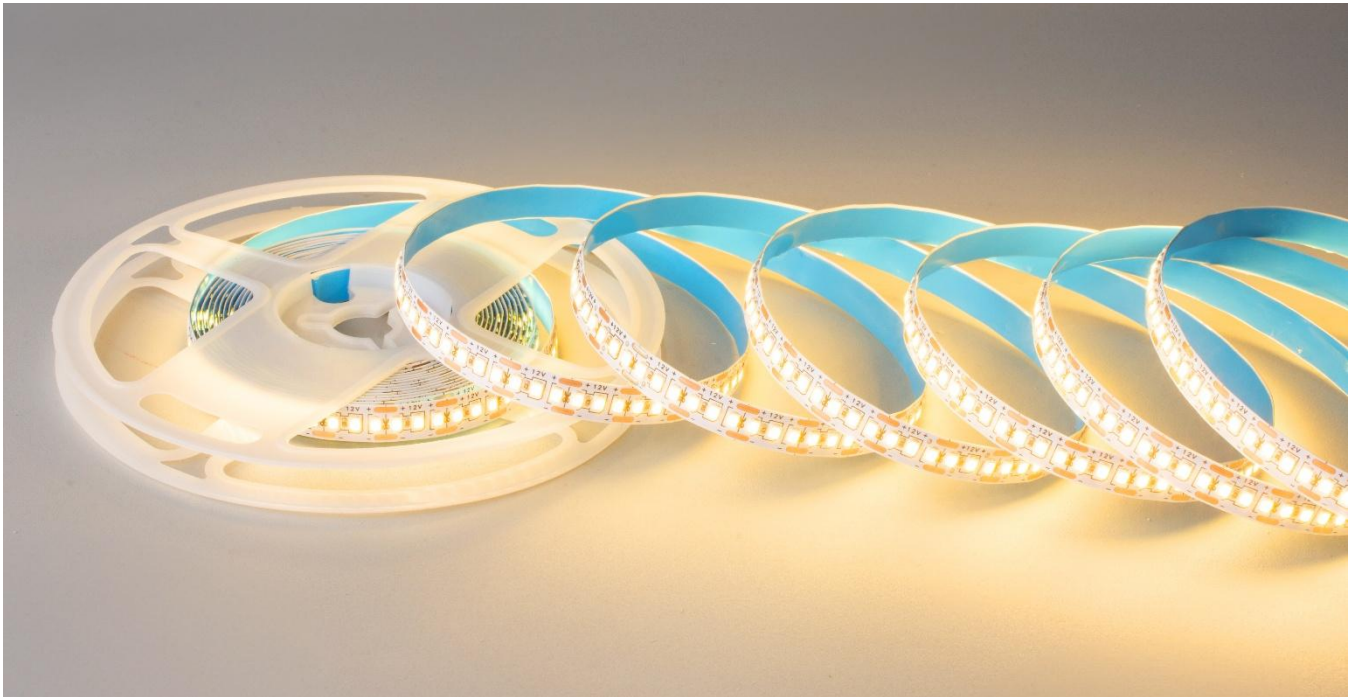

Bright Edge Series, LED Bulb 9W

Power : 9W

Lumen Efficacy : 105 Lumen/watt

Operating Voltage : ≥ 100 -300 Vac

Rated Voltage : 220-240 Vac

Rated Frequency : 50 Hz

Power Factor : ≥ 20.9

Surge Protection : ≥ 24.0 KV

Base Cap : B22



Precision Glow Series Emergency bulb 10W

Power : 10W

Operating Voltage : 100-300 Vac

Rated Voltage : 220-240 Vac

Input Frequency : 50Hz

Power Factor : ≥ 0.95

Charging Mode : Auto

Charging Time : 8-10 Hrs

Lumen Efficacy (lm/W) : 100

Surge Protection : 4KV

CRI : ≥ 80

Operating Temp. Range ($^{\circ}\text{C}$) : -10 to + 45

Housing Type : PC



Bright Edge Series, LED Bulb 30W

Power : 30W

Lumen Efficacy : 100 Lm/W

Operating Voltage : 100-300Vac

Rated Voltage : 220-240Vac

Frequency : 50Hz

Power Factor : ≥ 0.90

Surge Protection : $\geq 4.0KV$



Bright Edge Series, LED Bulb 50W

Power : 50W

Lumen Efficacy : ≥ 100 Lumen/watt

Operating Voltage : 100-300 Vac

Rated Voltage : 220-240 Vac

Rated Frequency : 50 Hz

Power Factor : ≥ 0.9

Surge Protection : ≥ 4.0 KV

Base Cap : B22



G-AXION Series-T30

COMMODITY G-AXION SERIES-T30

INPUT POWER : 30W

OPERATING VOLTAGE: 160-300 VAC/50Hz

LUMENS 3150 lm

OPERATING TEMP 10°C TO 45°C

POWER FACTOR 0.9

CRI 280

DIMENSION 295x110 mm

IP GRADE IP20

SURGE PROTECTION 4.0kV

BODY

PBT



G Visionedge Series, LED Street Light 30W

Item Name : LED Street Light

Input Power : 30w

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 3300lm

Power Factor > 0.95

CRI : >80

Start Mode : Instant Start

IP Rating : IP-66



G Visionedge Series, LED Street Light 50W

Item Name : LED Street Light

Input Power : 50w

Operating Volatage : 85-300VAC/50Hz

Operating Temp. : -10°C to +50°C

Lumen : 5500lm

Power Factor > 0.95

CRI : >80

Start Mode : Instant Start

IP Rating : IP-66



G-Luxline 5 way Led Liner Light

Model : G-Luxline

Power : 10W

Lumen Output : 1000 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI : ≥ 80



Stellar Beam SMD

Product Name : SMD Wireless Rope Light

LED Quantity : 120

Product Voltage : 220V

Packing Details : 50 MTR.

Carton Size : 305 x 108 x 305 mm



Bharat Beam Series

Generic Name: LED Rope Light

Model: Bharat Beam

LED Type: 2835 SMD

Rated Voltage: 220V~

LED/MTR: 120 LED/MTR

IP Rating: IP65

Length: 18 Meter/Roll

CCT: Tricolor



Lumoglass Series

Power : 12W

Lumen Output : 1200 lm

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz

CRI: ≥ 80



Quadcurve Series

Power: 12W

Lumen Output : 100 lm/W

Lumen Efficiency : 100 lm/Watt

Operating Voltage : 90-300 Volt

Operating Frequency : 50/60 Hz



G-FUSION AURA

Power : 8W

Lumen Efficiency : 50 Lumen/watt

Rated Voltage : 220V-240V

Rated Frequency : 50-60 Hz

Power Factor : ≥ 0.5 Surge Protection : > 2.5 KV



G-CRAFT GLOW

Power : 8W

Lumen Efficiency : 70 Lumen/watt

Rated Voltage : 220V-240V

Rated Frequency : 50-60 Hz

Power Factor : 20.5

Surge Protection : 22.5 KV



G-1U+1D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-1U+1D-I-EDGE

Input Power: 2W

Operating Voltage: 150-260VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 200 Lm*

Power Factor: >0.6

CRI: >80

IP Grade: IP65

Beam Angle: 24°

Surge Protection: 4.0kv

Dimension: 78x85x38 mm

Qty: 1 Numbe



G-2U+2D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-2U+2D-I-EDGE

Input Power: 4W

Operating Voltage: 150-260VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 400 Lm*

Power Factor: >0.6

CRI: >80

IP Grade: IP65

Beam Angle : 249

Surge Protection: 4.0kv

Dimension: 119x78x40 mm

Qty1 Numbe



G-3U+3D-I-EDGE

Up-Down Edge. Perfect Balance.

Item: G-3U+3D-I-EDGE

Input Power: 6W

Operating Voltage: 150-260VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 600 Lm*

Power Factor: >0.9

CRI: ≥80

IP Grade: IP65

Beam Angle 240

Surge Protection: 4.0kv

Dimension: 167x78x45 mm

Qty: 1 Number



G-4U+4D-I-EDGE

Up-Down Edge. Perfect Balance.

Item:G-4U+4D-I-EDGE

Input Power: 8W

Operating Voltage: 150-260VAC/50Hz

Operating Temperature-10°C to 45°C

Lumens: 800 Lm*

Power Factor: >0.9

CRI: >80

IP Grade: IP65

Beam Angle: 240

Surge Protection: 4.0kv

Dimension: 208X78X45mm

Qty: 1 Number



G-ASYMMETRIC 1/2K

"Single Side Throw. Smarter Glow."

Item: G-ASYMMETRIC 2K

Input Power:3W

Operating Voltage: 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 300 Lm

Power Factor: >0.6

CRI: >80

IP Grade: Ip65

Beam Angle:24°

Surge Protection: 4.0kv

Dimension: 71x80x61 mm

Qty: 1Number



G-BIAXIALK LIGHT

Biaxial Optics.Balanced Illumination.

Item: G-BIAXIAL K LIGHT

Input Power:6W

Operating Voltage: 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Lumens: 600 Lm

Power Factor:>0.6

CRI:>80

IP Grade: Ip65

Beam Angle24°

Surge Protection: 4.0kv

Dimension:142x80x61 mm

Qty: 1Number



G-QUADSPHERE

Geometry of Light. Poetry of Space.

Item:G-QUADSPHERE

Input Power4w

Operating Voltage: 220-240VAC/50Hz

Operating Temperature: -10°C to 45°C

Power Factor: >0.6

Lumens: 400 Lm

CRI:>80

IP Grade: Ip65

Beam Angle24°

Surge Protection: 4.0kv

Dimension:78x78x47 mm

Qty: 1Number



G-PINPOINT III, SERIES
FIX COB LIGHT



G-PINPOINT SWIVEL III SERIES
MOVEABLE COB LIGHT



SAFE HOME BUDDY SERIES

Long Lasting Battery Life

400 mAH Battery

Large Coverage Triplex Net

with 3600 V DC Discharge on Use For Best Effectiveness

Aesthetic & Ergonomic Design.90

Build With High Grade ABS

Material Giving More Durabilityisrito bine aso & Strength





Gutwillen

A LITTLE GOODWILL

